

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 0 852 072 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:  
22.09.1999 Bulletin 1999/38

(21) Application number: 96928158.3

(22) Date of filing: 13.08.1996

(51) Int Cl.<sup>6</sup>: H01M 10/40

(86) International application number:  
PCT/US96/13145

(87) International publication number:  
WO 97/11504 (27.03.1997 Gazette 1997/14)

(54) BATTERY CONTAINING BIS(PERFLUOROALKYLSULFONYL)IMIDE OR CYCLIC  
PERFLUOROALKYLENE DISULFONYLIMIDE SALTS

BIS(PERFLUOROALKYLSULFONYL)IMID-ODER ZYKLISCHE  
PERFLUOROALKYLENEDISULFONYLIMID-SALZE ENTHALTENDE BATTERIE

BATTERIE CONTENANT DES SELS BIS(PERFLUOROALKYLSULFONYL)-IMIDE ET  
(PERFLUOROALKYLENEDISULFONYL)-IMIDE CYCLIQUE

(84) Designated Contracting States:  
DE ES FR GB IT

(30) Priority 21.09.1995 US 531598  
29.05.1996 US 654650

(43) Date of publication of application:  
06.07.1998 Bulletin 1998/28

(72) Inventor: MINNESOTA MINING AND  
MANUFACTURING COMPANY  
St. Paul, Minnesota 55133-3427 (US)

(71) Applicant:

- CAMANA, William, M.  
Saint Paul, MN 55133-3427 (US)
- KRAUSE, Larry, J.  
Saint Paul, MN 55133-3427 (US)
- SUMMERFIELD, John, W.  
Saint Paul, MN 55133-3427 (US)

(74) Representative: VOSSIUS & PARTNER  
Siebertstrasse 4  
81675 München (DE)

(56) References cited:  
EP-A- 0 096 629 EP-A- 0 486 704  
EP-A- 0 585 162 EP-A- 0 589 229  
EP-A- 0 646 979 EP-A- 0 671 386  
WO-A-90/11999 FR-A- 2 606 217

- JOURNAL OF THE ELECTROCHEMICAL  
SOCIETY, vol. 138, no. 9, 1 September 1991,  
pages 2586-2590, XP000323776 WEBBER A:  
"CONDUCTIVITY AND VISCOSITY OF  
SOLUTIONS OF LiCF<sub>3</sub>SO<sub>3</sub>, Li(CF<sub>3</sub>SO<sub>2</sub>)<sub>2</sub>N, AND  
THEIR MIXTURES"
- EXTENDED ABSTRACTS, vol. 93/1, 1 January  
1993, page 115/116 XP000421696 KITA F ET AL:  
"ON THE NEW FLUORINATED ORGANIC  
LITHIUM SALTS FOR LITHIUM BATTERIES"

BEST AVAILABLE COPY

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

[0001] This invention relates to fluorinated anions of lithium salts useful in battery electrolyte compositions.

[0002] Electrolyte salts for use in electrochemical cells, e.g., lithium or lithium ion batteries, must exhibit good ionic conductivity and electrochemical, thermal, and chemical stability. In addition, the components of the electrochemical cell must be stable towards the electrolyte. Stability concerns are particularly acute in the case of electrochemical cells having aluminum cathode current collectors because aluminum is susceptible to corrosion.

[0003] Among the known electrolyte salts, lithium bis(trifluoromethanesulfonyl)imide  $((CF_3SO_2)_2N^{\cdot-}Li^+)$  has good conductivity and stability, but is highly corrosive toward aluminum at potentials above 3V(vs  $Li/Li^+$ ).  $LiPF_6$  has excellent conductivity and is noncorrosive, but is thermally and hydrolytically unstable.  $LiO_3SCF_3$  (also called lithium triflate) has good thermal and chemical stability, but has low conductivity and is also highly corrosive toward aluminum at positive electrode potentials above 3V(vs  $Li/Li^+$ ).


[0004] Indeed, the corrosion of aluminum at potentials above 3V in electrolytes containing lithium triflate or lithium bis(trifluoromethanesulfonyl)imide is so severe as to make these salts of little use for applications in the more advanced, high voltage cells, especially rechargeable cells. Thus, the use of presently-available electrolyte salts in high voltage lithium or lithium-ion cells has resulted in batteries having suboptimal performance characteristics such as restricted operating temperature ranges, limited discharge/charge rates and inadequate cycling performance, particularly when aluminum components are used.

[0005] The present invention relates to the discovery of certain salts of fluorochemical anions that are highly conductive in nonaqueous, polar organic media and inhibit corrosion of aluminum at high oxidation potentials. These salts are therefore useful as electrolytes in high voltage electrochemical cells, such as lithium batteries, which contain aluminum components. The fluorochemical salts are comprised of a cationic portion, which is typically a metal cation and an anionic portion. The invention provides electrochemical cells or batteries containing such electrolyte salts and aluminum components.

[0006] In one aspect, the invention features a battery that includes at least one positive electrode; at least one negative electrode; at least one aluminum current collector; and an electrolyte composition comprising a salt disposed in a matrix, said salt having the formula



or

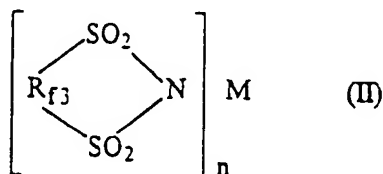

in which

$R_{f1}$  and  $R_{f2}$  are each independently a straight or branched perfluoroalkyl group of 1 to 12 carbon atoms, a perfluorocycloalkyl group or a perfluorocycloalkyl-perfluoroalkyl group of 4-7 ring carbon atoms and 1-4 carbon atoms in the alkyl chain wherein the ring carbon atoms may be optionally substituted by a straight or branched perfluoroalkyl group of 1 to 12 carbon atoms, with  $R_{f1}$  and  $R_{f2}$ , taken together, having a total of at least 3 carbon atoms, preferably at least 4 carbon atoms;  $R_{f3}$  is a perfluoroalkylene moiety of 2 to 6 (preferably 3 to 5) carbon atoms, optionally substituted by a straight or branched perfluoroalkyl group of 1 to 12 carbon atoms or a perfluorocycloalkyl group of 4-7 carbon atoms;

M is a cation with a valence equal to n; and

n is an integer of 1 to 4;

wherein the voltage, measured at the positive electrode is greater than 3.0 volts vs.  $Li/Li^+$ .

[0007] In a preferred embodiment the battery has a cycle life greater than 50 cycles.

[0008] The inventive battery exhibits unexpected benefits in electrochemical performance. Specifically, the invention provides the use of electrolyte compositions that exhibit high ionic conductivity and excellent electrochemical, thermal,

and hydrolytic stability, yet at the same time inhibit degradation of aluminum battery components (e.g., corrosion of aluminum or aluminum coated components such as current collectors) at voltages typically encountered during battery operation (e.g., positive electrode (cathode) potentials greater than 3V, preferably greater than 3.5V and up to but not limited to 4.5V vs. Li/Li<sup>+</sup>). High voltage secondary batteries of this invention having aluminum components, such as the current collector, have a cycle life of greater than 50, preferably greater than 100 cycles.

[0009] The salts employed in the invention provide all of the desirable features previously associated with Li<sup>+</sup>N(SO<sub>2</sub>CF<sub>3</sub>)<sub>2</sub>, such as high ionic conductivity and high electrochemical, thermal, and chemical stability. Furthermore, they avoid the use of toxic elements (such as As and Sb) which could be harmful to the environment, and they pose no known explosion hazard (as with perchlorate). Therefore, the salts used in this invention provide much improved properties in nonaqueous electrolytes for high voltage, primary or secondary, lithium or lithium-ion batteries that contain aluminum or aluminum coated components.

[0010] Figure 1 is a cut-away view of a Li-ion battery of this invention.

[0011] Figure 2 is a graph illustrating cycling performance of various electrolytes in the Li-ion battery of Fig. 1 by measuring battery capacity vs number of cycles.

[0012] Figures 3 through 5 are graphs of data plotting the potential (in volts vs. Li/Li<sup>+</sup>) of a battery test cell versus current density.

[0013] Throughout this application the following definitions apply:

[0014] "Matrix" refers to a medium (e.g., a solid, liquid, gel or plasticized polymer) in which salts according to formulae (I) and (II) may be dissolved or dispersed to form an ionically conductive electrolyte composition.

[0015] "Macromolecular material" refers to a homopolymer, copolymer, or combination thereof, which may or may not be cross-linked and/or plasticized.

[0016] "Gel" refers to a physically or chemically cross-linked polymer swollen with solvent.

[0017] "Battery" includes all electrical energy storage devices, including capacitors, electrochromic devices, and electrochemical cells.

[0018] Voltages specified refer to potentials of a positive electrode measured relative to a Li/Li<sup>+</sup> reference electrode, except where otherwise noted.

[0019] "Cycle life" refers to the number of charge/discharge cycles measured at a minimum of 80% depth of discharge when the battery provides without losing more than 50% of original capacity (in mAh (milliampere-hour)).

[0020] Electrolyte compositions contained in the battery of the invention include a matrix in which is disposed one or more salts of perfluoroalkylsulfonfyl)imide or cyclic perfluoroalkylene disulfonfylimide salts having the structure set forth in formulae of invention, above. The electrolyte compositions based upon these salts are particularly useful in primary and secondary (rechargeable) batteries (especially secondary lithium batteries) containing aluminum (positive electrode) cathode current collectors because they do not promote aluminum corrosion at voltages typically encountered during battery operation (e.g., in the range from about 3.0 to 4.5V measured at the positive electrode vs. Li/Li<sup>+</sup>).


[0021] Secondary batteries of this invention, the electrolyte compositions based upon these salts further provide excellent cycling performance; specifically they provide cycle lives greater than 50 cycles, preferably greater than 100 cycles. Corrosion of aluminum current collectors is known to adversely affect cycle life in rechargeable batteries.

[0022] Preferred salts are those of the formula



wherein R<sub>1</sub> and R<sub>2</sub> are each independently a straight or branched perfluoroalkyl group of 1 to 8 carbon atoms, more preferably of 1 to 4 carbon atoms, with R<sub>1</sub> and R<sub>2</sub>, taken together, having a total of at least 3 carbon atoms; M is a cation with valence equal to n; and n is an integer of 1 to 4. More preferably, R<sub>1</sub> and R<sub>2</sub> taken together have at least 4 carbon atoms and M is an alkali or alkaline earth metal, a transition metal, a rare earth metal, or a Group IIB or IIIB metal.


[0023] Also preferred as salts are those of the formula

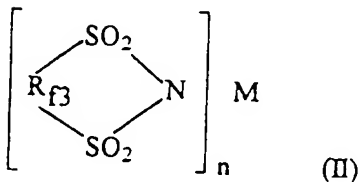

in which R<sub>f3</sub> is a perfluoroalkylene group of 2 to 5 carbon atoms optionally substituted by a straight or branched per-

fluoroalkyl group of 1 to 4 carbon atoms and M and n are as defined above. More preferably,  $R_{13}$  is a perfluoroalkylene group of 3 or 4 carbon atoms. Most preferably,  $R_{13}$  has 3 carbon atoms.


[0024] Representative imide anions of Formula I are  $\cdot N(SO_2C_2F_5)_2$ ,  $\cdot N(SO_2C_2F_5)(SO_2CF_3)$ ,  $\cdot N(SO_2C_3F_7)_2$ ,  $\cdot N(SO_2C_3F_7)(SO_2CF_3)$ ,  $\cdot N(SO_2C_4F_9)_2$ ,  $\cdot N(SO_2C_4F_9)(SO_2CF_3)$ ,  $\cdot N(SO_2C_6F_{13})_2$ ,  $\cdot N(SO_2C_8F_{17})(SO_2CF_3)$ ,  $\cdot N(SO_2-CF_2-c-C_6F_{11})(SO_2CF_3)$ . Representative imide anions of Formula II are:



[0025] In general, the above described bis(perfluoroalkylsulfonyl)imide and cyclic perfluoroalkylenedisulfonylimide salts can be prepared from the reaction of fluoroalkylsulfonyl fluorides,  $R_1SO_2F$ , or perfluoroalkylenedisulfonyl fluoride,  $FSO_2R_2SO_2F$ , with anhydrous ammonia. Symmetrical imides in which  $R_{11}$  and  $R_{12}$  are the same can be prepared in a single step using a weakly basic organic solvent such as triethylamine as shown in Scheme I, whereas unsymmetrical imides in which  $R_{11}$  and  $R_{12}$  are different must be prepared in two steps as shown in Scheme II.


### SCHEME I

$Et_3N$




### SCHEME II

Ether



$Et_3N$



[0026] Cyclic perfluoroalkylenedisulfonylimide salts can be prepared as described in U.S. Patent No. 4,387,222.

[0027] Perfluoroalkylsulfonylfluorides and perfluoroalkylenedisulfonylfluorides used as precursors to the imide salts of this invention can be prepared by a variety of methods known in the art as described, for example, in U.S. Patents 3,542,864; 5,318,674; 3,423,299; 3,951,762; 3,623,963; 2,732,398 and S. Temple, *J. Org. Chem.*, 33(1), 344 (1968), D.D. DesMarteau, *Inorg. Chem.*, 32, 5007 (1993).

[0028] To form the electrolyte composition, the salt is mixed with the matrix material such that the salt is at least partially dissolved or dispersed in the matrix material. The salt is preferably employed at a concentration such that the conductivity of the electrolyte solution is at or near its maximum value, although a wide range of other concentrations will also serve.

[0029] The matrix material may be in the form of a solid, liquid, gel or a liquid impregnated porous membrane. For battery applications, the matrix is chosen to provide the particular conductance, viscosity, mechanical strength, and reactivity properties desired for the electrolyte.

[0030] Although lithium ( $Li^+$ ) is a preferred cation M, other useful metal cations are:  $Na^+$ ,  $K^+$ ,  $Ca^{2+}$ ,  $Mg^{2+}$ ,  $Zn^{2+}$ , and  $Al^{3+}$ . Preferred metal cations and preferred solvents or matrix materials are dependent on cathode and anode construction in the battery. For lithium or lithium-ion batteries (having a lithium metal or lithium-ion intercalated anode) the preferred cation is  $Li^+$ , and the preferred solvents are aprotic (e.g., excluding water and alcohols).


[0031] Mixtures of matrix materials can be employed and are sometimes preferred in tailoring the matrix material's properties to provide optimum performance. In general, the amount of matrix material is selected such that the salt concentration ranges from about 0.1M to about 2.0M, preferably about 1M.

[0032] Suitable matrix materials for preparing electrolyte solutions can be liquid, polymeric or mixtures of polymer and liquid. Examples of suitable solid matrix materials include polymers and copolymers such as polyethers like poly


(ethylene oxide), polyesters, polyacrylates, polyphosphazenes, polysiloxanes, poly(propylene oxide), fluoropolymers (e.g., poly(vinylidene fluoride)), and poly(acrylonitrile), as well as the polymers and copolymers described in Armand et al., U.S. Patent No. 4,505,997, and mixtures thereof. The polymers may be used in cross-linked or uncross-linked form and/or plasticized. Such materials are generally dry, i.e., have a water content less than about 100 ppm, preferably less than about 50 ppm.

[0033] In batteries comprising a highly reducing electrode (such as lithium metal) and a liquid matrix material, the liquid is preferably a nonaqueous, polar, aprotic, organic solvent. Such liquids are generally dry, i.e., have a water content less than about 100 ppm, preferably less than about 50 ppm. Examples of suitable aprotic liquids include linear ethers such as diethyl ether, diethylene glycol dimethyl ether, and 1,2-dimethoxyethane; cyclic ethers such as tetrahydrofuran, 2-methyltetrahydrofuran, dioxane, dioxolane, and 4-methyldioxolane; esters such as methyl formate, ethyl formate, methyl acetate, dimethyl carbonate, diethyl carbonate, propylene carbonate, ethylene carbonate, and butyrolactones (e.g., gamma butyrolactone); nitriles such as acetonitrile and benzonitrile; nitro compounds such as nitromethane or nitrobenzene; amides such as N,N-dimethylformamide, N,N-diethylformamide, and N-methylpyrrolidinone; sulfoxides such as dimethyl sulfoxide; sulfones such as dimethylsulfone, tetramethylene sulfone, and other sulfonates; oxazolidinones such as N-methyl-2-oxazolidinone and mixtures thereof. Maximum conductivities of the electrolyte salts of this invention in typical nonaqueous, polar, aprotic liquid media (e.g., propylene carbonate) are generally in the range of 0.1 - 20 mS, (milliSiemens) at room temperature, preferably greater than 1 mS.

[0034] In some cases, it may be desired to add other salts to the electrolyte composition in order to maximize performance (such as corrosion properties, conductivity of battery components by the electrolyte). Such salts include, but are not limited to, alkali metal, alkaline earth metal, and Group IIIB metal (e.g., aluminum) salts of anions such as  $\text{NO}_3^-$ ,  $\text{BF}_4^-$ ,  $\text{PF}_6^-$ ,  $\text{AsF}_6^-$ ,  $\text{ClO}_4^-$ ,  $\text{SbF}_6^-$ ,  $\text{R}_f\text{SO}_3^-$  (in which  $\text{R}_f$  is a perfluoroalkyl group having between 1 (preferably 2) and 12 carbon atoms, inclusive); a bis-(perfluoromethylsulfonyl)imide anion; an anion having a formula selected from the group consisting of  $\text{R}_{f1}\text{R}_{f2}\text{N}(\text{CF}_2)_n\text{SO}_2\text{X}^-$  and




or  $\text{R}_{f1}\text{R}_{f2}\text{N}(\text{CF}_2)_n\text{SO}_2\text{R}_{f3}$ , or



or  $\text{R}_{f1}\text{R}_{f2}\text{N}(\text{CF}_2)_n\text{SO}_2\text{X}^-$




or  $\text{R}_{f1}$ ,  $\text{R}_{f2}$ , and  $\text{R}_{f3}$ , independently, are  $-\text{CF}_3$ ,  $-\text{C}_m\text{F}_{2m+1}$ , or  $-(\text{CF}_2)_q\text{SO}_2\text{X}^-\text{M}^+$ ;  $\text{R}_{f4}$ ,  $\text{R}_{f5}$ , and  $\text{R}_{f6}$ , independently, are  $-\text{CF}_3$ ,  $-\text{C}_m\text{F}_{2m+1}$ , or  $-(\text{CF}_2)_q\text{SO}_2\text{X}^-\text{M}^+$ .



or

BEST AVAILABLE COPY



$\text{R}_{f8}$  is  $-\text{CF}_3$ ,  $-\text{C}_m\text{F}_{2m+1}$ , or  $-(\text{CF}_2)_q-\text{SO}_2-\text{X}^+\text{M}^+$ ;  $\text{R}_{f6}$  and  $\text{R}_{f7}$ , independently, are perfluoroalkylene moieties having the formula  $-\text{C}_r\text{F}_{2r-}$ ;  $n$  is 1-4;  $r$  is 1-4;  $m$  is 1-12 preferably 1-8; and  $q$  is 1-4; (such salts are described by Waddell, et al. in U.S. 5514493); a bis-perfluoroalkylsulfonyl methide anion  $\text{R}_f-\text{SO}_2-\text{C}^-(\text{R})-\text{SO}_2-\text{R}_f'$  in which  $\text{R}_f$  and  $\text{R}_f'$ , independently, are perfluoroalkyl groups having between 1 and 12 carbon atoms, inclusive, and  $\text{R}$  is H, Br, Cl, I, an alkyl group having between 1 and 20 carbon atoms, inclusive, aryl, or alkylaryl; and a tris(perfluoroalkylsulfonyl)methide anion of the formula  $-\text{C}(\text{SO}_2\text{R}_f)(\text{SO}_2\text{R}_f')(\text{SO}_2\text{R}_f'')$  in which  $\text{R}_f$ ,  $\text{R}_f'$ , and  $\text{R}_f''$ , independently, are perfluoroalkyl groups having between 1 and 12 carbon atoms, inclusive.

[0035] Representative examples of suitable salts include,  $\text{LiNO}_3$ ,  $\text{LiBF}_4$ ,  $\text{LiAsF}_6$ ,  $\text{LiClO}_4$ ,  $\text{LiPF}_6$ ,  $\text{CF}_3\text{SO}_3\text{Li}$ ,  $\text{C}_2\text{F}_5\text{SO}_3\text{Li}$ ,  $\text{C}_{10}\text{F}_{21}\text{SO}_3\text{Li}$ ,  $(\text{CF}_3\text{SO}_2)_2\text{NLi}$ ,  $(\text{CF}_3\text{SO}_2)_2\text{NNa}$ ,  $[(\text{CF}_3\text{SO}_2)_2\text{N}]_3\text{Al}$ ,  $(\text{CF}_3)_2\text{NC}_2\text{F}_4\text{SO}_3\text{Li}$ ,  $(\text{CF}_3\text{SO}_2)_2\text{C}(\text{CH}_3)\text{Li}$ ,  $\text{cyclo}(\text{CF}_2\text{SO}_2)_2\text{C}(\text{C}_6\text{H}_5)\text{Li}$ ,  $(\text{CF}_3\text{SO}_2)_3\text{CLi}$ ,  $[(\text{CF}_3)_2\text{NC}_2\text{F}_4\text{SO}_2]_2\text{NLi}$  and mixtures thereof.

[0036] Preferred salts are nitrate salts ( $\text{NO}_3^-$ ). Addition of nitrate salts to the electrolyte composition has been found to provide improved uniformity of current density at relatively higher temperatures. The counterion of the nitrate salt can be any counterion that will provide sufficient ionization within the electrolyte solution to provide useful conductivity properties. Nitrate salts that are preferred include nitrate salts having counterions such as: a tetraalkyl ammonium ion ( $\text{NR}_4^+$ , wherein each  $\text{R}$  can independently be a lower alkyl such as methyl, ethyl, butyl, etc.); an alkali metal; an alkaline earth metal; a rare earth metal; a Group IIB metal; a Group IIIB metal; or mixtures thereof.

[0037] Addition of small amounts of these salts to the electrolyte composition is preferred because these salts have been found to reduce corrosion and prevent increases in cell resistance in batteries operated at, or subjected to, elevated temperatures. The salts may be added in any amount that provides such results, with concentration from about 0.1 mM (millimolar) to about 500 mM, preferably from about 0.1 mM to about 100 mM, most preferably between 1.0 mM and 50 mM. When used in relatively low concentrations the nature of the cation is not critical for many applications, although lithium (i.e.  $\text{LiClO}_4$ ) is especially preferred.

[0038] The anodes and cathodes of the inventive electrochemical cell are generally particles of active material blended with a conductive diluent such as carbon black and graphite and bound into a plastic material. Typical binders are polyvinylidene fluoride, ethylene-propylene-diene (EPDM) terpolymer, and emulsified styrenebutadiene rubber (SBR) among others, and the binder may be cross-linked. The binder may be for example a solid carbon matrix formed from the thermal decomposition of an organic compound. The composite electrode material is in turn applied to an expanded metal screen or metal foil (preferably aluminum) current collector using a variety of processes such as coating, casting, pressing, or extrusion. In polymer electrolyte batteries the polymer electrolyte can act as the active material binder.

[0039] Some examples of negative electrodes are carbon based materials such as graphite, coke, carbon fiber, and pitch, transition metal oxides such as  $\text{LiTi}_5\text{O}_{12}$  and  $\text{LiWO}_2$ , lithium metal and lithium alloys. In the case of lithium-ion batteries, the lithium may be intercalated into a host material such as carbon, (i.e., lithiated carbon) or carbon alloyed with other elements such as Si, B and N, a conductive polymer or an inorganic host material that is intercalatable, such as  $\text{Li}_x\text{Ti}_5\text{O}_{12}$ ,  $\text{Li}_x\text{V}_2\text{O}_5$ ,  $\text{Li}_x\text{V}_6\text{O}_{13}$ , and  $\text{Li}_x\text{Mn}_2\text{O}_4$  and  $\text{Li}_x\text{MnO}_2$  (the spinel and alpha forms respectively). The material comprising the anode (negative electrode) of an electrochemical cell may be carried on foil (e.g., nickel or copper) backing or pressed into expanded metal screen and alloyed with various other metals.

[0040] Active cathode (positive electrode) materials provide cell voltages of at least 3.0 volts at a full state of charge relative to  $\text{Li/Li}^+$  and include, but are not limited to  $\text{Li}_x\text{CoO}_2$ ,  $\text{Li}_x\text{NiO}_2$ ,  $\text{Li}_x\text{Mn}_2\text{O}_4$  and  $\text{Li}_x\text{MnO}_2$ ,  $\text{V}_2\text{O}_5$ ,  $\text{V}_6\text{O}_{13}$ , and fluorinated carbon, including the charged and discharged forms of these materials, and conducting polymers such as polypyrrole and polyvinylferrocene.

[0041] The invention includes primary and secondary batteries. In primary batteries, the cathode (positive electrode) could be fluorinated carbon  $(\text{CF}_x)_n$ ,  $\text{SO}_2$ ,  $\text{SO}_2\text{Cl}_2$ , or  $\text{Ag}_2\text{CrO}_4$ .

[0042] The invention is illustrated further by the following examples.

## EXAMPLES

[0043] The salts  $\text{Li}^+\text{N}(\text{SO}_2\text{CF}_3)_2$  and  $\text{Li}^+\text{OSO}_2\text{CF}_3$  used in the examples are commercially available in high purity from Minnesota Mining and Manufacturing Company as Fluorad™ Lithium Trifluoromethanesulfonimide Battery Electrolyte, HQ-115 and as Fluorad™ Lithium Trifluoromethanesulfonate, FC-122, respectively. High purity, battery grade  $\text{Li}^+\text{PF}_6^-$  was purchased from Hashimoto Chemical Co., Ltd. through a US distributor (Biesterfeld U.S., Inc.). All salt samples were stored and handled in a nitrogen or argon filled dry box (Vacuum Atmospheres Inc.) to prevent contam-

ination by water.

### Example 1

#### 5 Lithium (trifluoromethanesulfonyl) (perfluorobutanesulfonyl)imide

[0044] Under a nitrogen atmosphere, a dry, 500 mL Fisher-Porter pressure bottle equipped with a stainless steel pressure head and magnetic stirrer was charged with 35.00 g  $\text{CF}_3\text{SO}_2\text{NH}_2$  (prepared, e.g., as described in Foropoulos and DesMarteau, Inorg. Chem., 23:3720-23 (1984)), 98 mL anhydrous triethylamine and 74.55 g  $\text{C}_4\text{F}_9\text{SO}_2\text{F}$ . The pressure vessel was sealed and the reaction mixture heated to 90°C with stirring for 17 hours. The volatile components of the reaction mixture were evaporated under reduced pressure at 70°C then the reaction mixture was treated with a mixture of 700 mL water and 700 mL methylene chloride with stirring to form a two phase mixture. The methylene chloride phase was then separated, washed with two 700 mL portions of water, dried over anhydrous  $\text{MgSO}_4$ , filtered and then evaporated under reduced pressure to yield a dark red liquid. This liquid was combined with 500 g of polyphosphoric acid (Aldrich Chemical Co.) in a short path vacuum distillation apparatus equipped with an ambient air-cooled condenser, and then vacuum distilled at ca. 0.1 Torr. The distillate (96.5 g, corresponding to  $\text{HN}(\text{SO}_2\text{CF}_3)(\text{SO}_2\text{C}_4\text{F}_9)$ , which solidified in receiver at 0°C, was further purified by sublimation at 70°C, 1.0 Torr and then added in portions to a slurry of 52 g of  $\text{Li}_2\text{CO}_3$  (99.997% purity, from Aldrich Chemical Co.) in 800 mL of methyl t-butyl ether with stirring at room temperature. After ca. 1 hour  $\text{CO}_2$  evolution subsided and the reaction mixture was heated to ca. 40°C for 3.5 hours to complete the neutralization. The mixture was filtered by gravity through filter paper and then filtered again by suction through a 0.22 micron Tefsep™ Teflon membrane (Micron Separations Inc.) to remove particulates. The filtrate was evaporated under reduced pressure at 25-80°C to yield a clear, colorless oil. Two 250 mL portions of toluene were combined with the oil and the mixture evaporated at 40-70°C, 20 Torr after each toluene addition, causing the oil to eventually solidify giving a fine white powder. The solid was transferred to a glass jar and dried in vacuo at 100°C, 10<sup>-2</sup> Torr for 24 hours to yield 77.0 g of the anhydrous title salt. The structure of the product was confirmed by <sup>1</sup>H and <sup>19</sup>F NMR spectroscopy which indicated that the purity of the salt was greater than 99% by weight.

### Example 2

#### 30 Lithium (trifluoromethanesulfonyl) (perfluoroethanesulfonyl)imide

[0045] Under a nitrogen atmosphere, a dry 3L flask equipped with a dry ice condenser, mechanical stirrer, and a sparging tube was charged with 500 mL anhydrous methyl t-butyl ether (MTBE) and cooled below 0°C in a dry ice bath. To this solvent was added 500 g of crude  $\text{CF}_3\text{CF}_2\text{SO}_2\text{F}$  mixture (containing ca. 23%  $\text{CF}_3\text{CF}_2\text{SO}_2\text{F}$  by weight in 20% ethyl acetate in hexane solvent). Gaseous anhydrous ammonia (194 g) was gradually introduced through the sparging tube into the reacting mixture at ca. 0°C with vigorous stirring. Once ammonia addition was complete, the reaction was allowed to proceed for an additional hour after which the dry ice bath was removed and the reaction solution stirred at room temperature with stirring. Excess ammonia was allowed to evaporate while stirring overnight at room temperature. The reaction solution was cooled again to 0°C and treated with 83.9 g  $\text{LiOH}\cdot\text{H}_2\text{O}$  dissolved in 750 mL of water with stirring. The mixture was filtered through filter paper by gravity to remove  $\text{LiF}$  precipitate. To the filtrate was added concentrated aqueous  $\text{HCl}$  in portions with stirring at 0°C until the pH of the mixture was 0.

[0046] The resulting two-phase mixture was separated into separate aqueous and ether phases. The aqueous phase was extracted with two additional 400 mL portions of MTBE. The ether fractions were combined, extracted with two 500 mL portions of water, and then dried over anhydrous  $\text{MgSO}_4$  overnight. The ether solution was filtered by gravity through filter paper and then by suction through a 0.22 micron Tefsep™ membrane (Micron Separations Inc.). The filtrate was concentrated by rotary evaporation, hexane was added, and the solution concentrated again. This was repeated until the product crystallized from solution as a white solid. The product (Crop 1) was isolated by suction filtration through a glass frit giving 33.0 g. A second crop of crystals (20.2 g) was recovered in the same manner from the filtrate by concentrating further followed by filtration. The remaining filtrate was evaporated to dryness at 40°C, 20 mm to yield a third crop of relatively crude product (26.8 g). All product fractions (Crops 1-3) were dried at 10<sup>-2</sup> Torr at room temperature for ca. 15 min to give a combined yield of 80.0 g. Quantitative <sup>1</sup>H and <sup>13</sup>C NMR analysis of the product from Crops 2 indicated that it was the desired product with a purity of 98% by weight.

[0047] Under a nitrogen atmosphere, a dry Parr 4560-Series Benchtop Mini Reactor equipped with a 600 mL capacity Monel reactor cylinder, mechanical stirrer, thermocouple and heating mantle was charged with 53 g  $\text{CF}_3\text{CF}_2\text{SO}_2\text{NH}_2$  (Crops 1 + 2) and 152 mL anhydrous triethylamine. While cooling the reactor at -78°C in dry ice, 55.2 g of gaseous  $\text{CF}_3\text{SO}_2\text{F}$  (ca. 94% purity) was condensed into the reactor with stirring. The reactor was sealed and the temperature of the reaction mixture gradually raised to 90°C with vigorous stirring, then held at 90°C with stirring for a total of 24 hours. The volatile components of the reaction mixture were evaporated under reduced pressure at 70°C, then the

residue was treated with a mixture of 700 mL water and 700 mL methylene chloride with stirring to form a two phase mixture. The methylene chloride phase was then separated, washed with two 700 mL portions of water, dried over anhydrous  $\text{MgSO}_4$ , filtered and then evaporated under reduced pressure to yield a dark red liquid. This liquid was combined with 600 g of polyphosphoric acid (Aldrich Chemical Co.) in a short path vacuum distillation apparatus equipped with an ambient air-cooled condenser, and then vacuum distilled at ca. 15 Torr, 85-88°C. The distillate (78.1 g, corresponding to  $\text{HN}(\text{SO}_2\text{CF}_3)(\text{SO}_2\text{C}_2\text{F}_5)$ ), which solidified in receiver at 0°C, was converted to the corresponding lithium salt, and further purified, using essentially the procedure described in Example 1 to yield 75.0 g of the anhydrous title salt. The structure of the product was confirmed by  $^1\text{H}$  and  $^{19}\text{F}$  NMR spectroscopy which indicated that the purity of the salt was 98% by weight.

### Example 3

Lithium Bis(perfluoroethanesulfonyl)imide

[0048] As in Example 2, a dry Parr 4560-Series Benchtop Mini Reactor was charged with 155 mL anhydrous triethylamine. While cooling the reactor at -78°C in dry ice, gaseous  $\text{C}_2\text{F}_5\text{SO}_2\text{F}$  (100.0 g, > 99% purity) followed by anhydrous ammonia (3.51 g) were condensed into the reactor with stirring. The reactor was sealed and the temperature of the reaction mixture gradually raised to 90°C with vigorous stirring. The reaction mixture was held at 90°C with stirring for a total of 20.5 hours. The intermediate product,  $\text{HN}(\text{SO}_2\text{C}_2\text{F}_5)_2$ , was isolated as previously described, then added to a slurry of  $\text{Li}_2\text{CO}_3$  (45.7 g, 99.997% purity) in 800 mL of methyl t-butyl ether to produce the lithium salt. This crude lithium salt was further purified using essentially the procedure described in Example 1 to yield 73.34 g (92% yield based upon  $\text{NH}_3$ ) of the anhydrous title salt. The structure of the product was confirmed by  $^1\text{H}$  and  $^{19}\text{F}$  NMR spectroscopy which indicated that the purity of the salt was 99.9% by weight.

### Example 4

Lithium Bis(perfluorobutanesulfonyl)imide

[0049] As in Example 1, a dry, 500 mL Fisher-Porter pressure bottle was charged with anhydrous triethylamine (100.5 g) and  $\text{C}_4\text{F}_9\text{SO}_2\text{F}$  (145.0 g). The pressure vessel was sealed, cooled to -78°C in dry ice and then charged with of anhydrous ammonia (3.0 g) with stirring. After warming gradually to room temperature, the reaction mixture was heated to 90°C with stirring for 24 hours. The intermediate product,  $\text{HN}(\text{SO}_2\text{C}_4\text{F}_9)_2$ , was isolated as previously described, then added to a slurry of  $\text{Li}_2\text{CO}_3$  (40.0 g, 99.997% purity) in 800 mL of methyl t-butyl ether to produce the lithium salt. This crude lithium salt was further purified using essentially the procedure described in Example 1 to yield 90.8 g (86% yield based upon  $\text{NH}_3$ ) of the anhydrous title salt. The structure of the product was confirmed by  $^1\text{H}$  and  $^{19}\text{F}$  NMR spectroscopy which indicated that the purity of the salt was 98% by weight.

### Example 5

Lithium Bis(perfluoropropanesulfonyl)imide

[0050] As in Example 4, the title compound was prepared using anhydrous triethylamine (100.5 g),  $\text{C}_3\text{F}_7\text{SO}_2\text{F}$  (100.0 g, 68:32 *iso:normal* isomer ratio), and anhydrous ammonia (3.0 g). A total of 40.8 g of the anhydrous title salt was recovered as a light pink solid. Quantitative analysis by  $^1\text{H}$  and  $^{19}\text{F}$  NMR spectroscopy indicated that the product contained the following major components in order of decreasing weight-%:  $\text{Li}^+\text{N}(\text{SO}_2\text{C}_3\text{F}_7)_2$ , 85.1%, 39:61 *iso:normal*  $\text{C}_3\text{F}_7$  ratio;  $\text{Li}^+\text{N}(\text{SO}_2\text{i-C}_3\text{F}_7)(\text{SO}_2\text{F})$ , 8.7%;  $\text{Li}^+\text{N}(\text{SO}_2\text{n-C}_3\text{F}_7)(\text{SO}_2\text{F})$ , 4.2%.

### Example 6

Lithium cyclic-1,3-perfluoropropanedisulfonylimide

[0051] The acidic form of the title compound,  $\text{HN}(\text{SO}_2\text{C}_3\text{F}_6\text{SO}_2)$ , was prepared according to the method described in Koshar, US Patent 4,387,222, Example 1 and converted to the anhydrous lithium salt using the method described in Example 4 of the present description. A total of 26.4 g (56% yield, based upon 1,3-perfluoropropanedisulfonyl fluoride) of the anhydrous title salt was isolated with a purity of 98.7% by  $^1\text{H}$  and  $^{19}\text{F}$  NMR spectroscopy.



Example 7

Lithium cyclic-1,2-perfluoroethanedisulfonylimide,

[0052] The acidic form of the title compound,  $\text{HN}(\text{SO}_2\text{C}_2\text{F}_4\text{SO}_2)$ , was prepared according to the method described in Koshar, US Patent 4,387,222, Example 3 and converted to the anhydrous lithium salt using the method described in Example 4 of the present description. A total of 16.6g (61% yield, based upon 1,2-perfluoroethanedisulfonylfluoride) of the anhydrous title salt was isolated with a purity of 99.8% by  $^1\text{H}$  and  $^{19}\text{F}$  NMR spectroscopy.

[0053] The inventive electrolyte compositions are particularly useful in that they control or prevent aluminum corrosion in electrochemical cells operating at voltages greater than 3V and up to but not limited to 4.5V, referenced to lithium metal.

[0054] One way to assess the extent of aluminum corrosion in the presence of a particular electrolyte solution is to measure the anodic current density vs. time response at a fixed d.c. potential of a cell containing an aluminum electrode having a freshly exposed aluminum surface, as described in the Examples section below. The higher the current density, the faster aluminum corrosion is occurring.

[0055] Another practical measure of the compatibility of a particular electrolyte solution with aluminum is given by the cycling performance of a high voltage, secondary (or rechargeable) battery containing the electrolyte solution of interest and a cathode comprising an aluminum current collector.

Test Methods

[0056] Corrosion current measurements were made according to the technique generally described in Bard and Faulkner, Electrochemical Methods: Fundamentals and Applications, John Wiley and Sons, New York, 1980, pp. 350-353. An electrochemical cell was constructed having an aluminum working electrode. A lithium wire inserted in a luggin capillary into a glass capillary into which the electrode was inserted) served as a reference electrode and a 10 cm<sup>2</sup> platinum tag was used as an auxiliary electrode. The working electrode was fabricated from a 99.999% aluminum rod inserted into a Teflon sleeve to provide a planar electrode area of 0.07 cm<sup>2</sup>. The native oxide layer was removed by first polishing the planar working surface with 3  $\mu\text{m}$  aluminum oxide paper using hexane as a lubricant under ambient conditions, followed by a second polishing under an argon atmosphere.

[0057] After polishing, the cell was assembled under argon, connecting the three electrodes to a potentiostat. The cell was filled with approximately 10 mL of a 1M solution of the electrolyte salt dissolved in propylene carbonate. The solvent had been previously dried by stirring over  $\text{CaH}_2$  for 24 hrs., followed by vacuum distillation. The electrolyte salt was dried under vacuum at 120°C for at least 18 hrs. The final water content of the electrolyte solution was less than 10 ppm, as measured by Karl Fischer titration. The aluminum electrode was polarized at +4.2V vs.  $\text{Li/Li}^+$  (iR compensated) and the current was recorded vs. time.

[0058] Current measurements (in microamps/cm<sup>2</sup>), taken after one hour, are summarized in Table I, below. Additionally, the area under the current vs. time curve (millicoulombs, mC) is used as a measure of the maximum possible amount of aluminum corrosion occurring. This data is also summarized in Table I. Data for the following salts is included for comparative purposes:

$\text{Li}^+\text{N}(\text{CF}_3)_2\text{SO}_2\text{CF}_3$ ,  $\text{Li}^+\text{O}_3\text{SCF}_3$  and  $\text{Li}^+\text{PF}_6$  (designated COMP1, COMP2 and COMP3, respectively in Table I).

[0059] Another feature which is important to battery performance is ionic conductivity. Conductivity measurements of various electrolytes at a concentration of 1M in PC/DME, propylene carbonate/dimethoxy ethane (1:1 by volume), are also recorded in Table I.

TABLE I

Example	Current Density $\mu\text{A}/\text{cm}^2$	Integrated Chronoamperometric Area (mC)	Conductivity 1M ( $\text{mS}^*$ )
1	5.19	2.31	9.4
2	2.8	2.48	10.6
3	2.00	0.94	9.8
4	2.51	0.7	7.1
5	1.26	0.83	
6	2.31	1.37	11.1
Comp 1	7.570	2360	9.9
Comp 2	17.600	5860	6.4
Comp 3	0.9	0.7	17

\* mS = milliSiemens

[0060] The data in Table I shows that while  $\text{LiN}(\text{SO}_2\text{CF}_3)_2$  and  $\text{LiO}_3\text{SCF}_3$  are highly corrosive toward aluminum and produce large corrosion currents, the salts of the present invention are at least three orders of magnitude less corrosive and produce corrosion currents comparable to  $\text{LiPF}_6$ , a widely used lithium salt known to be noncorrosive when in contact with aluminum at high potentials. Additionally, the data show that salts used in the present invention provide ionic conductivities useful for high performance battery applications.

[0061] High performance can be demonstrated in cells under typical cycling conditions using high voltage, rechargeable lithium ion batteries constructed with aluminum positive current collectors and suitable electrode materials. Electrolyte salts compatible with aluminum will provide long cycle life with minimal loss in capacity; whereas, corrosive salts cause a sharp drop in battery capacity (mAh) after a relatively small number of cycles.

[0062] In Examples 8 and 9 and in Comparative Examples 4-6, batteries (as shown in Figure 1) were prepared and subjected to a minimum of fifty charge-discharge cycles using a commercial battery tester from Maccor Inc., Tulsa Oklahoma to measure the capacity of the cells. The anode 1 was prepared using a mixture of 85.5 wt% XP grade petroleum coke (Conoco Co), 4.5 wt% Ensagri Super "S" carbon black and 10 wt% polytetrafluoroethylene (PTFE) binder, mixed together in a grinding device such as a food processor or coffee grinder and pressed into pellets approximately 12 to 14 mils (.31 to .36 mm) in thickness and 7 mm in diameter. The cathode was formulated using a mixture of 83.7 wt.%  $\text{LiCoO}_2$ , 6.3 wt.% Shawinigan carbon black and 10 wt.% PTFE mixed as described above and pressed into pellets about 0.33 mm thick and 7 mm in diameter. The cell stack assembly comprised a 31 mil (.80 mm) copper disk 3 as the anode current collector, 14 mil (.36 mm) thick anode, a 2 mil (0.05 mm) porous polyethylene cell separator 5, 12.5 mil (.32 mm) thick cathode 7 of  $\text{LiCoO}_2$  and a 20 mil (.51 mm) thick aluminum cathode current collector 9. The stack was placed into the chromium steel "1225" coin cell can 10 (12 mm in diameter and 2.5 mm stack depth) and 40  $\mu\text{L}$  of 1.0 M electrolyte were added. The can was then compressively sealed with the polypropylene gasket 12 and stainless steel top 14. All cell assembly operations were done in a dry atmosphere. The batteries tested were as follows:

Example 8 1M  $\text{LiN}(\text{SO}_2\text{C}_2\text{F}_5)_2$ , Example 3, in 1:1 (volume) mixture of ethylene carbonate/dimethyl carbonate

Example 9 1M  $\text{LiN}(\text{SO}_2)_2(\text{CF}_2)_3$ , Example 6, in 1:1 (volume) mixture of ethylene carbonate/dimethyl carbonate

Comparative Example 4 1M  $\text{LiN}(\text{SO}_2\text{CF}_3)_2$  in 1:1 (volume) propylene carbonate/dimethoxy ethane

Comparative Example 5 1M  $\text{LiSO}_3\text{CF}_3$  in 1:1 (volume) propylene carbonate/dimethoxy ethane

Comparative Example 6 1M  $\text{LiPF}_6$  in 1:1 (volume) propylene carbonate/dimethoxy ethane

[0063] Each battery was individually loaded into the battery tester and charged at a constant voltage of 4.2V, with a maximum current limitation of 5mA, until the current dropped to 0.1mA (end of charge). Each cell was then discharged under a constant current of 0.8mA until the cell voltage reached 2.75V (end of discharge). After approximately ten charge/discharge cycles each cell was charged under constant voltage of 4.2V with a maximum current limit of 5mA until the current reached 0.1mA. The cells were then discharged under constant current of 0.8mA until the cell voltage reached 3V. The current for each cell was then interrupted (0 current) and the voltage recorded for 30 minutes under zero current conditions to provide a measure of internal cell resistance. Each cell was then charged under a constant voltage of 4.2V with a maximum current limit of 5mA for a total of 24 hours. The cell was then discharged at a constant current of 0.8mA to 3.0V and a 30 minute current interrupt was applied. After the interrupt the cell is discharged to 2.75V under a constant current of 0.8mA. The procedure was repeated for a minimum of fifty cycles.

[0064] The results of these tests are shown in Figure 2 as a plot of battery capacity (mAh) vs. cycle number for each of the batteries tested.

[0065] The lines plotted are:

line A - Example 8  $\text{LiN}(\text{SO}_2\text{C}_2\text{F}_5)_2$

line B - Comparative Example 6  $\text{LiPF}_6$

line C - Example 9  $\text{LiN}(\text{SO}_2)_2(\text{CF}_2)_3$

line D - Comparative Example 4  $\text{LiN}(\text{SO}_2\text{CF}_3)_2$

line E - Comparative Example 5  $\text{LiO}_3\text{SCF}_3$  (lithium triflate)

[0066] In Figure 2, the smooth portion of each line provides a measure of cell capacity as a function of cycle number under conditions of relatively rapid rate of cell discharge. The occasional spikes in Figure 2 are the result of increased capacity resulting from the application of a current interrupt preceded by a 24 hour charging period. The test procedure demonstrates the effect of a 24 hour charging period (in which corrosion is most likely to occur) on cell capacity before and after the charging period. The cycling data of Figure 2 shows that  $\text{LiO}_3\text{SCF}_3$  and  $\text{LiN}(\text{SO}_2\text{CF}_3)_2$  cause battery

capacity to drop precipitously to zero after just one or two cycles. The electrolyte salts of the present invention provide more than fifty cycles with less than a 20% loss in cell capacity. The data further demonstrates that the salts of the present invention provide cycling performance comparable to or exceeding  $\text{LiPF}_6$ , a salt commonly employed in commercial lithium-ion batteries.

[0067] The inventive batteries with the specified electrolyte salts are unique in that aluminum corrosion is suppressed at high electrochemical potentials (potentials greater than +3.0 Volts vs.  $\text{Li/Li}^+$ ), while at the same time providing very good ionic conductivity and stability (e.g., thermal, electrochemical, and hydrolytic stability). The batteries of Examples 8 and 9 showed no significant increase in internal cell resistance after the 24 hour potential hold.

[0068] As shown in Table I and Figure 2, electrolyte compositions used in the invention are less corrosive than known electrolyte compositions containing other perfluoro-organosulfonyl salts. In some instances, electrolyte compositions used in the invention approach or exceed the performance of inorganic salts such as  $\text{Li}^+\text{PF}_6^-$  which are known not to promote corrosion.

[0069] Examples 10-14 show the effect of adding electrolyte salts to batteries operated at elevated temperatures. In these Examples the electrochemical cell (described under Test Methods) was filled with 1.0 M lithium bis(perfluoroethylsulfonyl)imide in 1:1 (vol) ethylene carbonate/dimethyl carbonate. The aluminum electrode was polarized for one hour at 4.2V  $\text{Li/Li}^+$ , and then the potential was increased in 50mV increments while recording the current density in  $\mu\text{A}/\text{cm}^2$ . The added electrolyte, concentration, temperature and corresponding Figures for these Examples are shown in Table II.

TABLE II

Example	Added electrolyte (concentration (mM))	Temperature	Figure
10	None	25°C	3
11	None	60°C	3
12	$\text{LiNO}_3$ (25)	60°C	3, 4, 5
13	$\text{LiNO}_3$ (13)	60°C	3
14	$\text{LiNO}_3$ (6.5)	60°C	3
15	$\text{LiNO}_3$ (3.25)	60°C	3
16	$\text{LiSO}_3\text{CF}_2\text{CF}_2\text{N}(\text{CF}_3)_2$ (100)	60°C	4
17	$\text{LiSO}_3\text{CF}_2\text{CF}_2\text{N}(\text{CF}_3)_2$ (21)	60°C	4
18	$\text{LiClO}_4$ (25)	60°C	5


[0070] The results of these tests are shown in Figures 3 through 5, which plot current density versus potential (in volts vs.  $\text{Li/Li}^+$ ). As can be seen in Figure 3, the electrolyte behaves normally at 25°C (Example 10), but current density increases precipitously at an increased temperature (60°C), as indicated by Example 11. With the added electrolyte salts in Examples 12-18 this increase in current density is suppressed at voltage levels below about 4.8V, as is indicated by the relatively constant current density below this voltage.

#### Claims

1. A battery comprising

- at least one positive electrode;
- at least one negative electrode;
- at least one aluminum current collector; and
- an electrolyte composition comprising a salt disposed in a matrix, said salt having the formula

BEST AVAILABLE

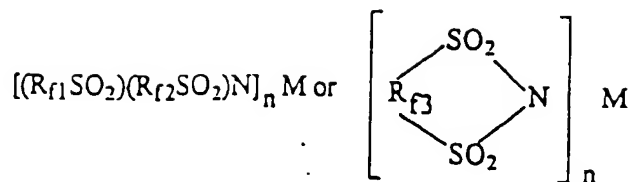

in which

$R_{f1}$  and  $R_{f2}$  are each independently a straight or branched perfluoroalkyl group of 1 to 12 carbon atoms, a perfluorocycloalkyl group or a perfluorocycloalkyl perfluoroalkyl group of 4-7 ring carbon atoms and 1-4 carbon atoms in the alkyl chain wherein the ring carbon atoms may be optionally substituted by a straight or branched perfluoroalkyl group of 1 to 12 carbon atoms, with  $R_{f1}$  and  $R_{f2}$  taken together having a total of at least 3 carbon atoms;

$R_{f3}$  is a perfluoroalkylene moiety of 2 to 6 carbon atoms optionally substituted by a straight or branched perfluoroalkyl group of 1 to 12 carbon atoms or a perfluorocycloalkyl group of 4-7 carbon atoms;


M is a cation with a valence equal to n; and

n is an integer of 1 to 4, wherein the voltage measured at the positive electrode is greater than 3.0 volts vs. Li/Li<sup>+</sup>.


2. The battery of claim 1 wherein M is lithium.

3. The battery of claim 1 wherein said salt is lithium bis(perfluoroethanesulfonyl)imide.

4. The battery of claim 1 further comprising a salt selected from alkali metal, alkaline earth metal, rare earth and Group IIB and IIIB metal salts of anions selected from NO<sub>3</sub><sup>-</sup>; BF<sub>4</sub><sup>-</sup>; PF<sub>6</sub><sup>-</sup>; AsF<sub>6</sub><sup>-</sup>; ClO<sub>4</sub><sup>-</sup>; SbF<sub>6</sub><sup>-</sup>; R<sub>f</sub>SO<sub>3</sub><sup>-</sup> in which R<sub>f</sub> is a perfluoroalkyl group having between 2 and 12 carbon atoms, inclusive, bis-(perfluoromethylsulfonyl)imide; R<sub>f1</sub>R<sub>f2</sub>N-(CF<sub>2</sub>)<sub>n1</sub>-SO<sub>2</sub>-X<sup>-</sup>;




in which X<sup>-</sup> is -O<sup>-</sup>, -N<sup>-</sup>SO<sub>2</sub>R<sub>f3</sub>, or




Z is -CF<sub>2</sub><sup>-</sup>, -O<sup>-</sup>,



or -SF<sub>4</sub><sup>-</sup>; R<sub>f1</sub> and R<sub>f2</sub>, independently, are -CF<sub>3</sub>, -C<sub>m</sub>F<sub>2m+1</sub>, or -(CF<sub>2</sub>)<sub>q</sub>-SO<sub>2</sub>-X<sup>-</sup>M<sup>+</sup>; R<sub>f3</sub>, R<sub>f4</sub>, and R<sub>f5</sub>, independently, are -CF<sub>3</sub>, -C<sub>m</sub>F<sub>2m+1</sub>, -(CF<sub>2</sub>)<sub>q</sub>-SO<sub>2</sub>-X<sup>-</sup>M<sup>+</sup>,



or




$R_{f3}$  is  $-CF_3$ ,  $-C_mF_{2m+1}$ , or  $-(CF_2)_q-SO_2-X^+M^+$ ;  $R_{f6}$  and  $R_{f7}$ , independently, are perfluoroalkylene moieties having the formula  $-C_rF_{2r+1}$ ,  $n_1$  is 1-4;  $r$  is 1-4;  $m$  is 1-12; and  $q$  is 1-4; bis-perfluoroalkylsulfonate methide anions having the formula  $R_f-SO_2-C^-(R)-SO_2-R_f'$  in which  $R_f$  and  $R_f'$ , independently, are perfluoroalkyl groups having between 1 and 12 carbon atoms, inclusive, and  $R$  is H, Br, Cl, I, an alkyl group having between 1 and 20 carbon atoms, inclusive, aryl, or alkylaryl, and a tris(perfluoroalkylsulfonate) methide anion of the formula  $-C(SO_2R_f)(SO_2R_f')(SO_2R_f'')$  in which  $R_f$ ,  $R_f'$ , and  $R_f''$ , independently, are perfluoroalkyl groups having between 1 and 12 carbon atoms, inclusive.

5. The battery of claim 1, further comprising  $LiNO_3$ .
6. The battery of claim 1, wherein the battery is rechargeable.
7. The battery of claim 6, wherein the battery has a cycle life greater than 50 cycles.

#### Patentansprüche

1. Batterie umfassend

mindestens eine positive Elektrode,  
mindestens eine negative Elektrode,  
mindestens einen Stromabnehmer aus Aluminium und  
eine Elektrolytzusammensetzung, umfassend ein in einer Matrix verteiltes Salz, wobei das Salz die Formel aufweist

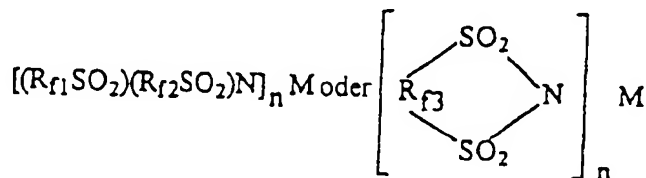

in der

$R_{f1}$  und  $R_{f2}$  jeweils unabhängig voneinander einen gerad- oder verzweigt-kettigen Perfluoralkylrest mit 1 bis 12 Kohlenstoffatomen, einen Perfluorocycloalkylrest oder einen Perfluorocycloalkylperfluoralkylrest mit 4-7 Ringkohlenstoffatomen und 1-4 Kohlenstoffatomen in der Alkylkette bedeutet, wobei die Ringkohlenstoffatome gegebenenfalls mit einem gerad- oder verzweigt-kettigen Perfluoralkylrest mit 1 bis 12 Kohlenstoffatomen substituiert sein können, wobei  $R_{f1}$  und  $R_{f2}$  zusammen genommen insgesamt mindestens 3 Kohlenstoffatome aufweisen;

$R_{f3}$  einen Perfluoralkylenrest mit 2 bis 6 Kohlenstoffatomen bedeutet, der gegebenenfalls mit einem gerad- oder verzweigt-kettigen Perfluoralkylrest mit 1 bis 12 Kohlenstoffatomen oder einem Perfluorcycloalkylrest mit 4-7 Kohlenstoffatomen substituiert ist;



M ein Kation mit einer Wertigkeit n bedeutet und

n eine ganze Zahl von 1 bis 4 ist, wobei die an der positiven Elektrode gemessene Spannung größer als 3,0 V gegen Li/Li<sup>+</sup> ist.


2. Batterie nach Anspruch 1, wobei M Lithium ist.

3. Batterie nach Anspruch 1, wobei das Salz Lithiumbis(perfluorethansulfonyl)imid ist.


4. Batterie nach Anspruch 1, die außerdem ein Salz, ausgewählt aus Alkalimetall-, Erdalkalimetall-, Seltenerdenmetall- und Metallsalzen der Gruppe IIB und IIIB von Anionen, ausgewählt aus NO<sub>3</sub><sup>-</sup>, BF<sub>4</sub><sup>-</sup>, PF<sub>6</sub><sup>-</sup>, AsF<sub>6</sub><sup>-</sup>, ClO<sub>4</sub><sup>-</sup>, SbF<sub>6</sub><sup>-</sup>, R<sub>f</sub>SO<sub>3</sub><sup>-</sup>, wobei R<sub>f</sub> einen Perfluoralkylrest mit 2 bis einschließlich 12 Kohlenstoffatomen bedeutet, Bis(perfluormethylsulfonyl)imid;




wobei X<sup>-</sup> -O<sup>-</sup>, -N-SO<sub>2</sub>R<sub>f3</sub> oder



bedeutet; Z -CF<sub>2</sub><sup>-</sup>, -O<sup>-</sup>, >NR<sub>f8</sub> oder -SF<sub>4</sub><sup>-</sup> bedeutet; R<sub>f1</sub> und R<sub>f2</sub> unabhängig voneinander -CF<sub>3</sub>, -C<sub>m</sub>F<sub>2m+1</sub> oder -(CF<sub>2</sub>)<sub>q</sub>-SO<sub>2</sub>-X<sup>-</sup>M<sup>+</sup> sind; R<sub>f3</sub>, R<sub>f4</sub> und R<sub>f5</sub> unabhängig voneinander -CF<sub>3</sub>, -C<sub>m</sub>F<sub>2m+1</sub>, -(CF<sub>2</sub>)<sub>q</sub>-SO<sub>2</sub>-X<sup>-</sup>M<sup>+</sup>,



oder



bedeutet;

R<sub>f8</sub> -CF<sub>3</sub>, -C<sub>m</sub>F<sub>2m+1</sub> oder -(CF<sub>2</sub>)<sub>q</sub>-SO<sub>2</sub>-X<sup>-</sup>M<sup>+</sup> darstellt; R<sub>f6</sub> und R<sub>f7</sub> unabhängig voneinander Perfluoralkylenreste der Formel -C<sub>r</sub>F<sub>2r</sub> darstellen; n<sub>1</sub> 1-4 ist; r 1-4 ist; m 1-12 ist und q 1-4 ist; Bis(perfluoralkylsulfonyl)methidanionen der Formel R<sub>f</sub>-SO<sub>2</sub>-C<sup>-</sup>(R)-SO<sub>2</sub>-R<sub>f</sub>, in der R<sub>f</sub> und R<sub>f</sub> unabhängig voneinander Perfluoralkylreste mit 1 bis einschließlich 12 Kohlenstoffatomen bedeuten und R H, Br, Cl, I, einen Alkylrest mit 1 bis einschließlich 20 Kohlenstoffatomen, einen Aryl- oder Alkylarylrest bedeutet und einem Tris(perfluoralkylsulfonyl)methidanion der Formel -C(SO<sub>2</sub>R<sub>f</sub>)(SO<sub>2</sub>R<sub>f</sub>')(SO<sub>2</sub>R<sub>f</sub>''), wobei R<sub>f</sub>, R<sub>f</sub>' und R<sub>f</sub>'' unabhängig voneinander Perfluoralkylreste mit 1 bis einschließlich 12 Kohlenstoffatomen bedeuten, umfaßt.

5. Batterie nach Anspruch 1, die außerdem  $\text{LiNO}_3$  umfaßt.
6. Batterie nach Anspruch 1, wobei die Batterie wiederaufladbar ist.
7. Batterie nach Anspruch 6, wobei die Batterie einen Lebenszyklus von mehr als 50 Zyklen besitzt.

## Revendications

1. Pile comprenant

au moins une électrode positive ;


au moins une électrode négative ;

au moins un collecteur de courant en aluminium ; et

une composition d'électrolyte comprenant un sel placé dans une matrice, ledit sel répondant à la formule



ou



dans laquelle

$R_1$  et  $R_2$  représentent chacun indépendamment un groupe perfluoroalkyle linéaire ou ramifié contenant de 1 à 12 atomes de carbone, un groupe perfluorocycloalkyle ou un groupe perfluorocycloalkyleperfluoroalkyle contenant 4-7 atomes de carbone dans le cycle et de 1-4 atomes de carbone dans la chaîne alkylque, les atomes de carbone du cycle pouvant être éventuellement substitués par un groupe perfluoroalkyle linéaire ou ramifié contenant de 1 à 12 atomes de carbone,  $R_1$  et  $R_2$ , pris ensemble, contenant un total d'au moins 3 atomes de carbone ;

$R_3$  représente une partie perfluoroalkylène comprenant de 2 à 6 atomes de carbone, éventuellement substituée par un groupe perfluoroalkyle linéaire ou ramifié contenant 1 à 12 atomes de carbone ou par un groupe perfluorocycloalkyle contenant de 4 à 7 atomes de carbone ;

M représente un cation avec une valence égale à n ; et

n représente un nombre entier de 1 à 4 ;


dans laquelle la tension mesurée à l'électrode positive est supérieure à 3,0 volts vs  $\text{Li/Li}^+$ .

2. Pile de la revendication 1, dans laquelle M représente le lithium.


3. Pile de la revendication 1, dans laquelle ledit sel est du bis(perfluoroéthanesulfonyl)imide de lithium.

4. Pile de la revendication 1, comprenant en outre un sel choisi parmi des sels de métaux alcalins, de métaux alcalino-

terreux, d' terres rares et de métaux des groupes IIB et IIIB d'anions choisis parmi  $\text{NO}_3^-$ ,  $\text{BF}_4^-$ ,  $\text{PF}_6^-$ ,  $\text{AsF}_6^-$ ,  $\text{ClO}_4^-$ ,  $\text{SbF}_6^-$ ,  $\text{R}_f\text{SO}_3^-$  dans lequel  $\text{R}_f$  représente un groupe perfluoroalkyle contenant de 2 à 12 atomes de carbone, inclus), bis(perfluorométhylsulfonyl)imide ;  $\text{R}_{f1}\text{R}_{f2}\text{N}-(\text{CF}_2)_{n1}-\text{SO}_2-\text{X}^-$  ;

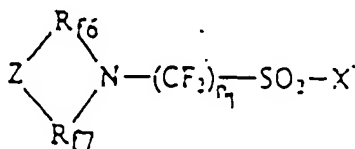


dans laquelle  $\text{X}^-$  représente  $-\text{O}^-$ ,  $\text{N}^-\text{SO}_2\text{R}_{f3}$ , ou




$\text{Z}$  représente  $-\text{CF}_2-$ ,  $-\text{O}-$ ,



ou  $-\text{SF}_4-$  ;  $\text{R}_{f1}$  et  $\text{R}_{f2}$  représentent, indépendamment,  $-\text{CF}_3$ ,  $-\text{C}_m\text{F}_{2m+1}$ , ou  $-(\text{CF}_2)_q-\text{SO}_2-\text{X}^-\text{M}^+$  ;  $\text{R}_{f3}$ ,  $\text{R}_{f4}$  et  $\text{R}_{f5}$  représentent, indépendamment,  $-\text{CF}_3$ ,  $\text{C}_m\text{F}_{2m+1}$ ,  $-(\text{CF}_2)_q-\text{SO}_2-\text{X}^-\text{M}^+$ ,



ou



$\text{R}_{f8}$  représente  $-\text{CF}_3$ ,  $\text{C}_m\text{F}_{2m+1}$ , ou  $-(\text{CF}_2)_q-\text{SO}_2-\text{X}^-\text{M}^+$  ;  $\text{R}_{f6}$  et  $\text{R}_{f7}$  représentent, indépendamment, des parties perfluoroalkylène ayant pour formule  $-\text{C}_r\text{F}_{2r}-$  ;  $n_1$  vaut 1-4 ;  $r$  vaut 1-4 ;  $m$  vaut 1-12 ; et  $q$  vaut 1-4 ; des anions bisperfluoroalkylsulfonylméthide ayant pour formule  $\text{R}_f-\text{SO}_2-\text{C}(\text{R})-\text{SO}_2-\text{R}_f$  dans laquelle  $\text{R}_f$  et  $\text{R}_f$  représentent, indépendamment, des groupes perfluoroalkyle contenant entre 1 et 12 atomes de carbone, inclus, et  $\text{R}$  représente H, Br, Cl, I, un groupe alkyle contenant entre 1 et 20 atomes de carbone, inclus, des groupes aryle ou alkylaryl ; et un anion tris(perfluoroalkylsulfonyl)méthide de formule  $-\text{C}(\text{SO}_2\text{R}_f)(\text{SO}_2\text{R}_f)(\text{SO}_2\text{R}_f)$  dans laquelle  $\text{R}_f$ ,  $\text{R}_f$  et  $\text{R}_f$  représentent, indépendamment, des groupes perfluoroalkyle contenant de 1 à 12 atomes de carbone, inclus.

5. Pile de la revendication 1, comprenant en outre du  $\text{LiNO}_3$ .
6. Pile de la revendication 1, dans laquelle la pile est rechargeable.



7. Pile de la revendication 6, la pile ayant une durée de vie en cycles supérieure à 50 cycles.

5

10

15

20

25

30


35

40

45

50

55

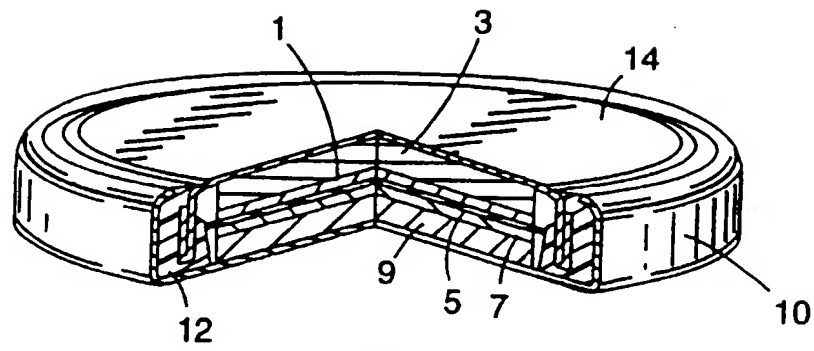

*Fig.1*

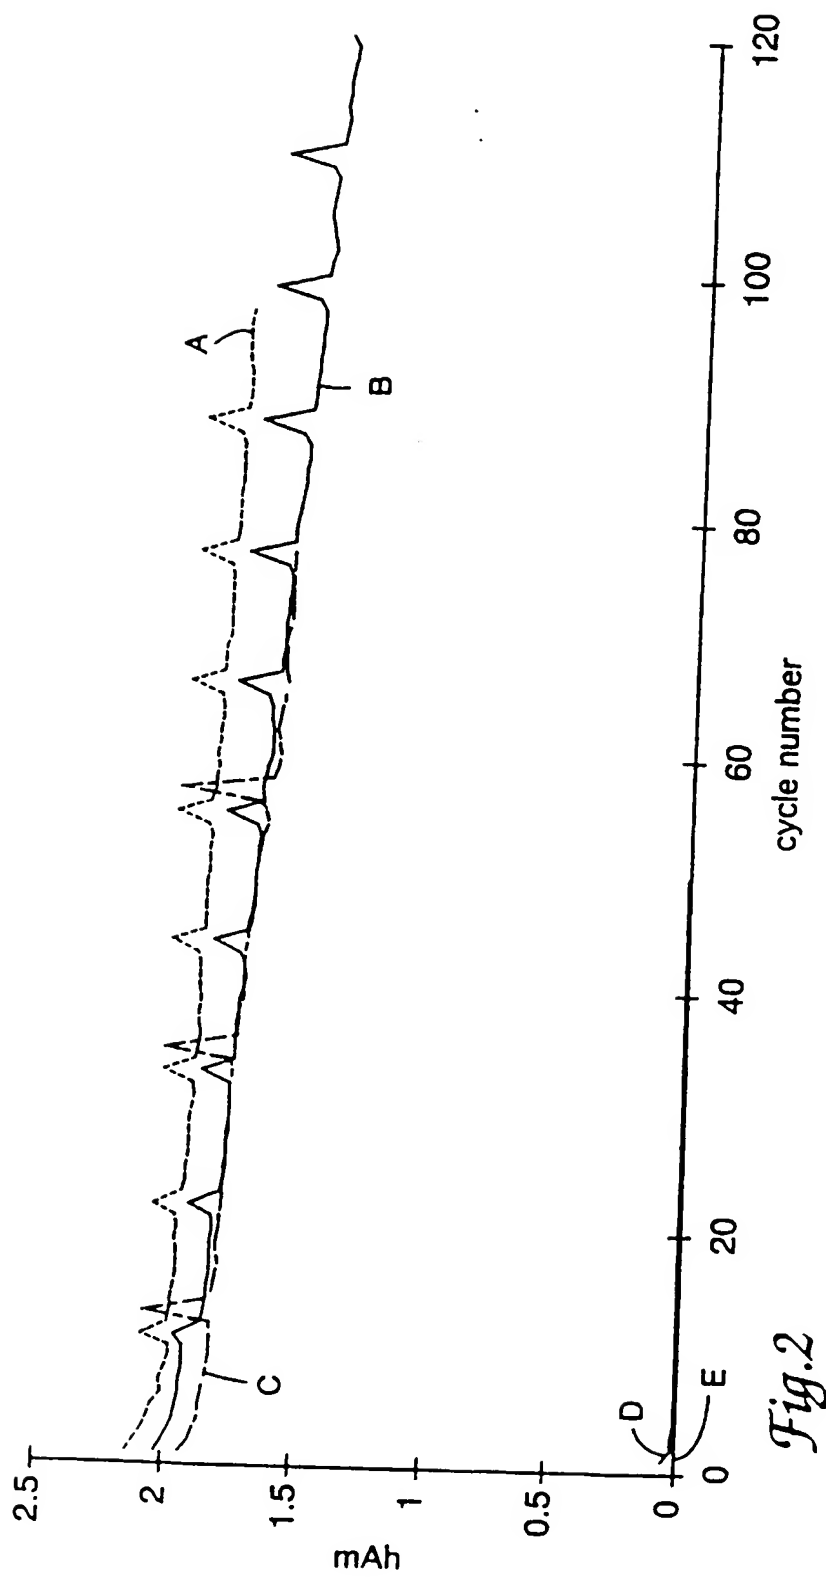
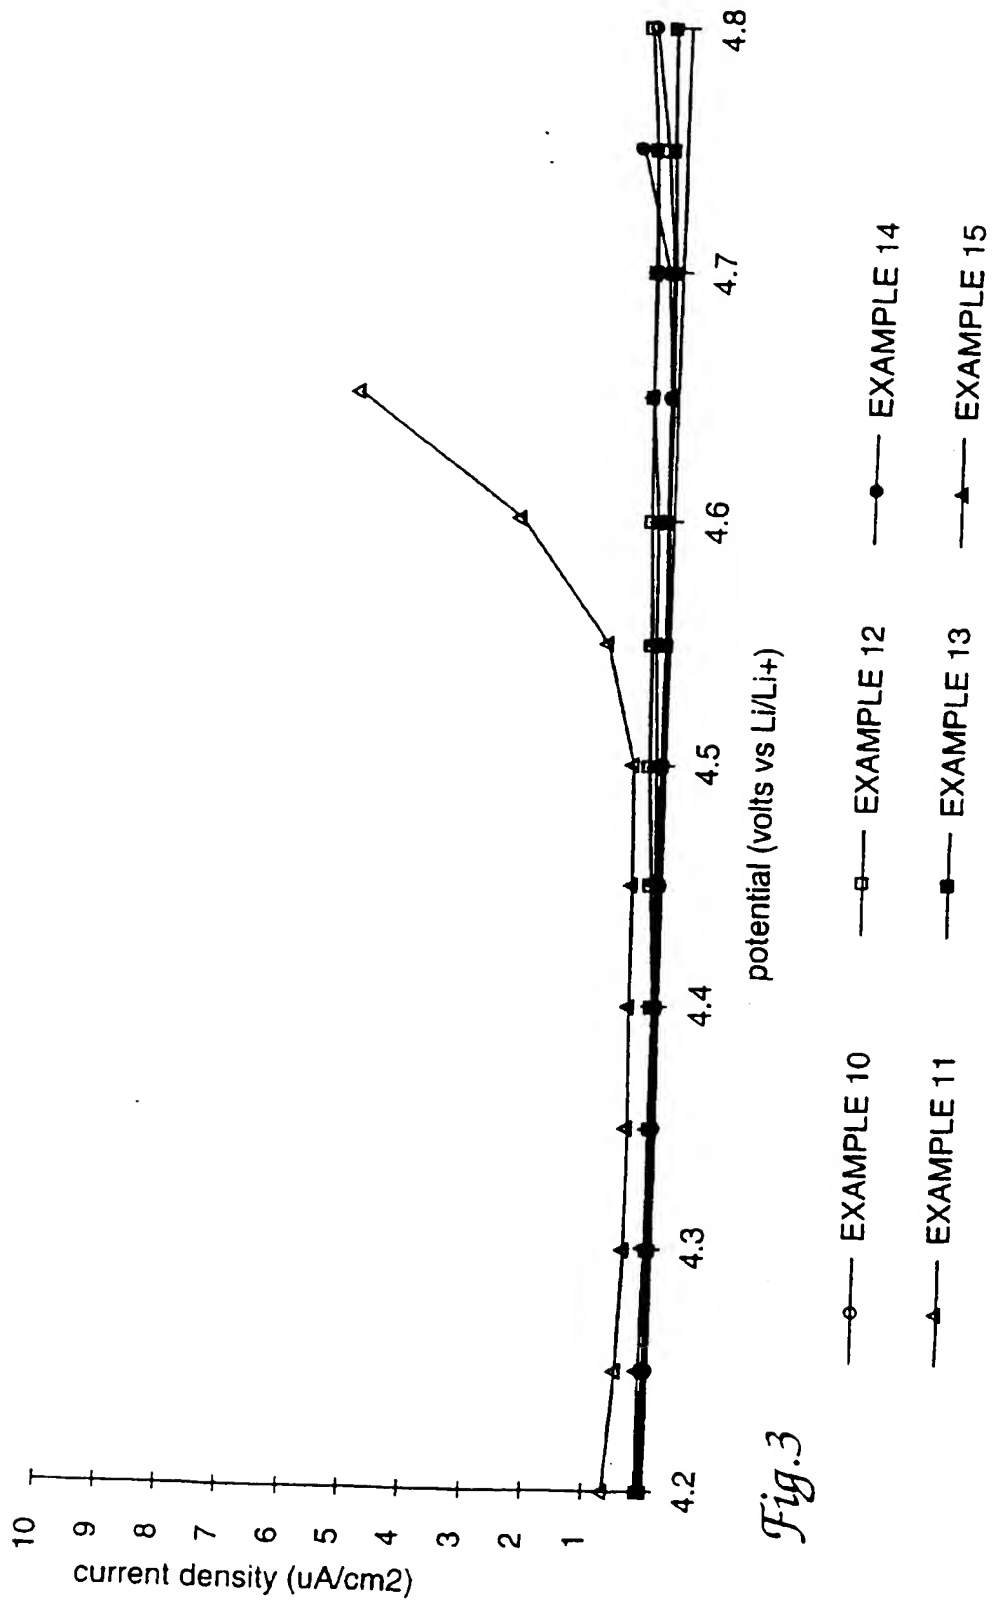
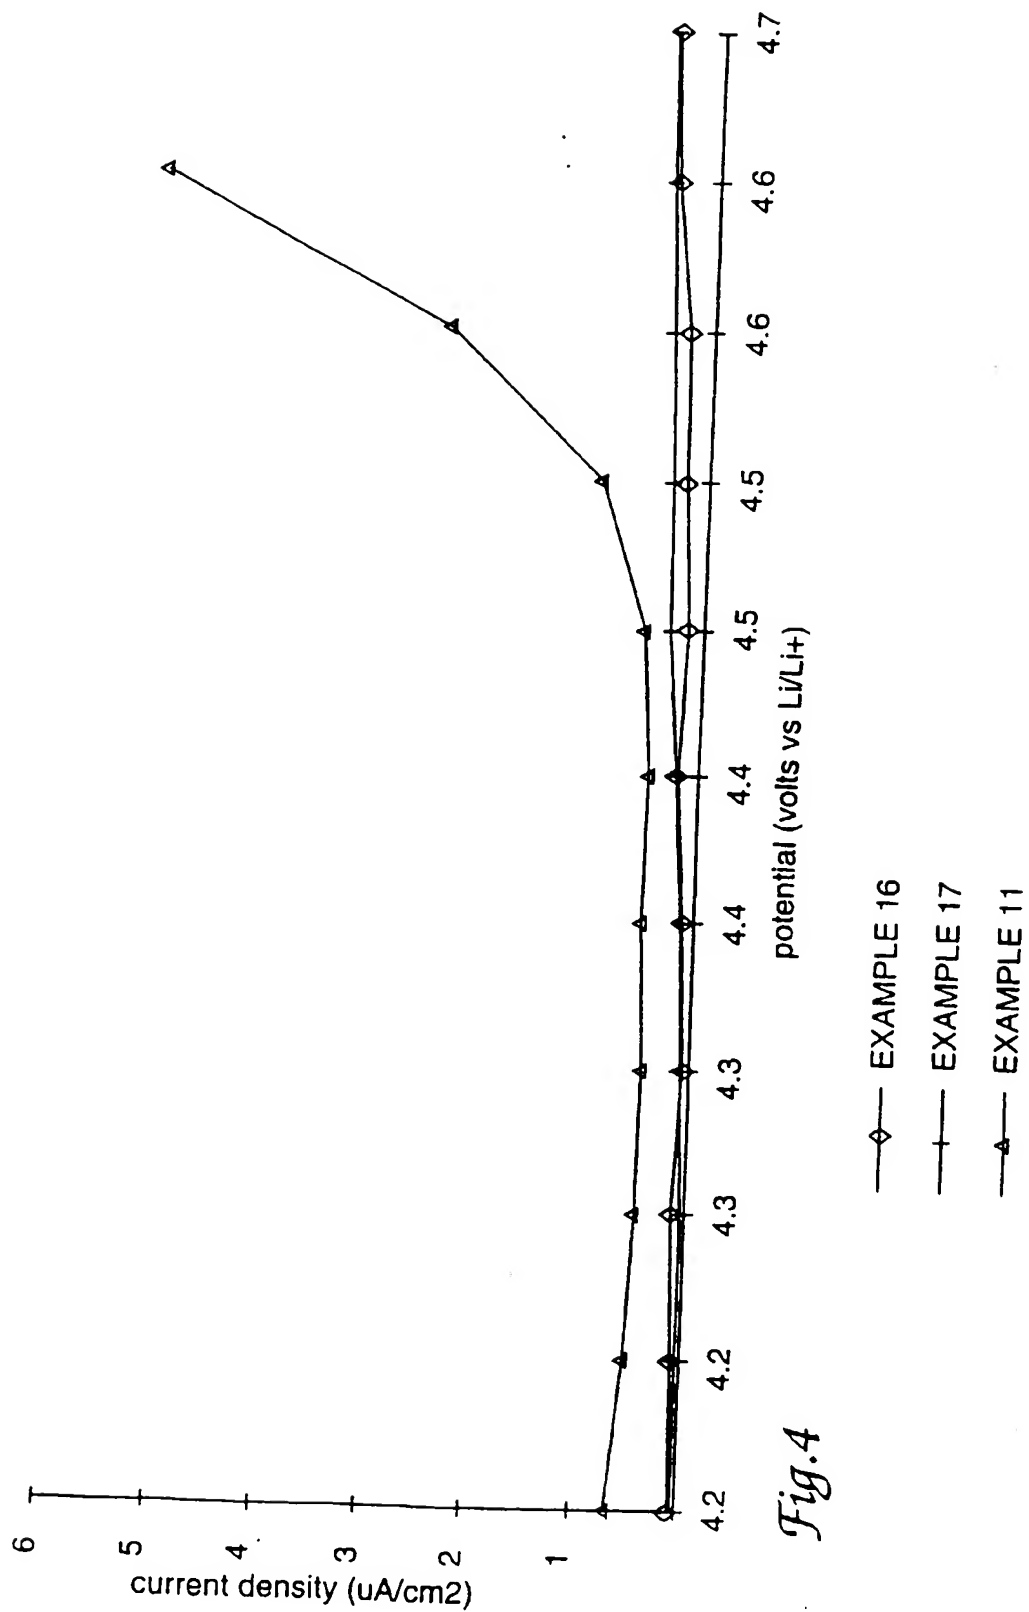


Fig.2





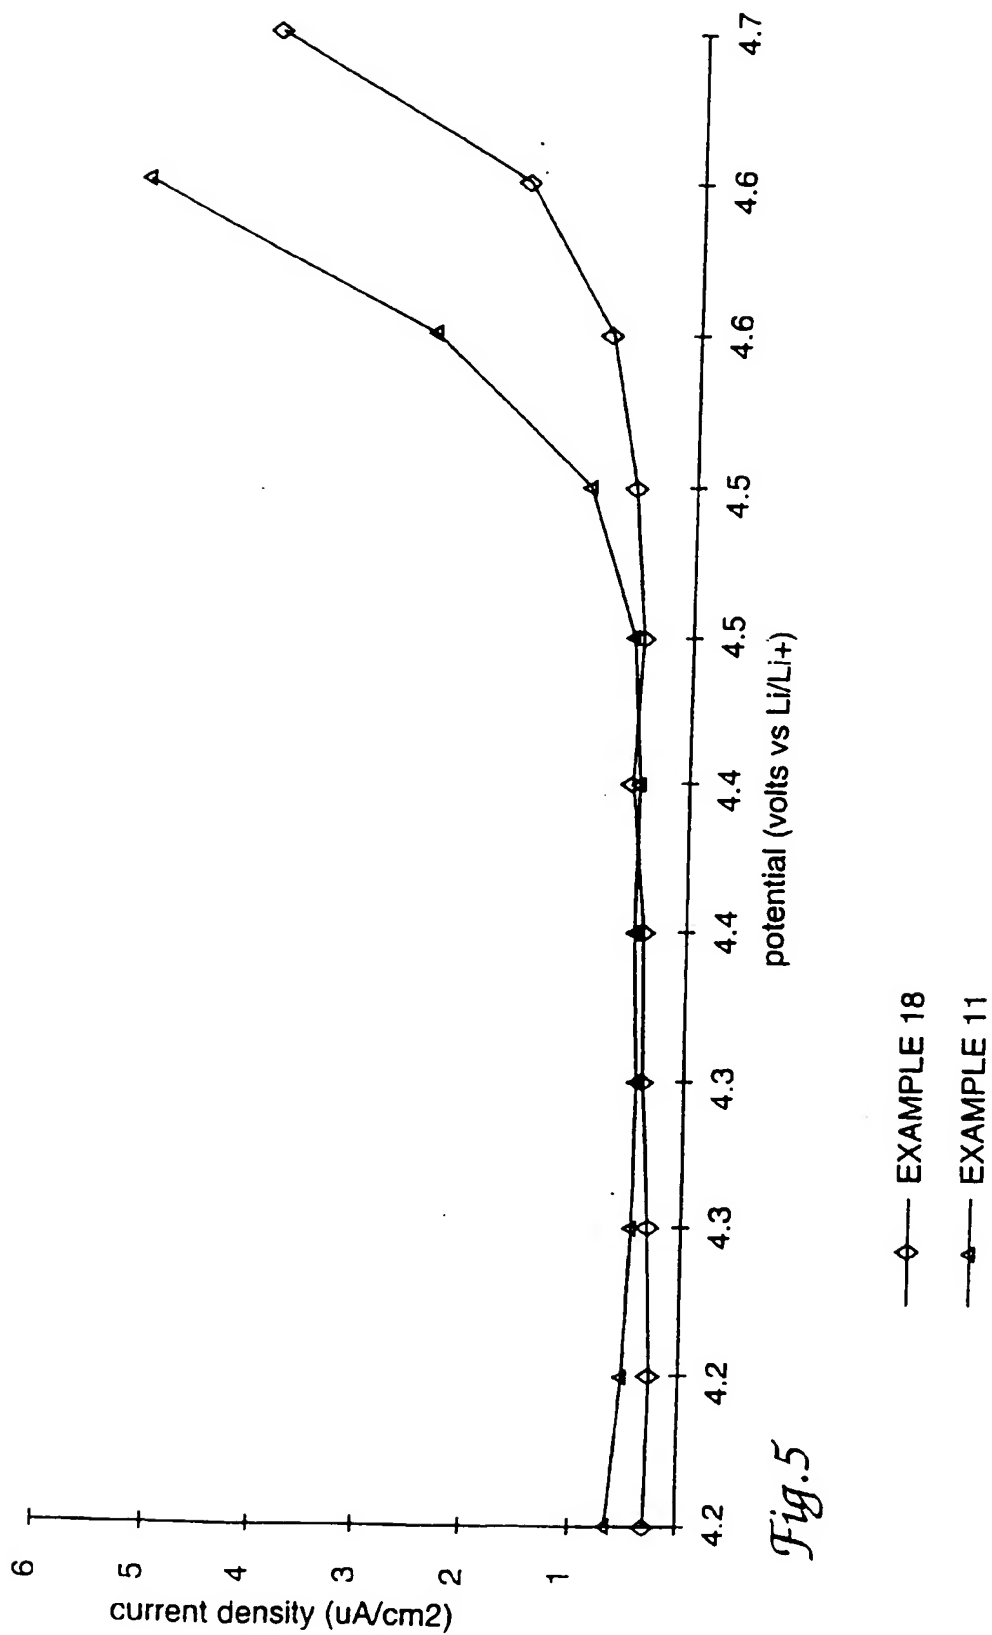


Fig.5